

Intelligent **DIGITAL SIGNAGE Crystal Series** Indoor & Outdoor transparent LED screen




Very see-through, without any change of architectural appearance and transparencey of glass wall, create the open view in large space indoors, and make advertising emerge into architecture and life.

DOIT VISION Transparent LED series is suitable for indoor and outdoor.

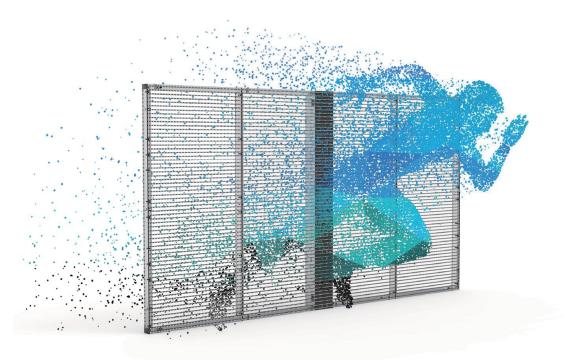

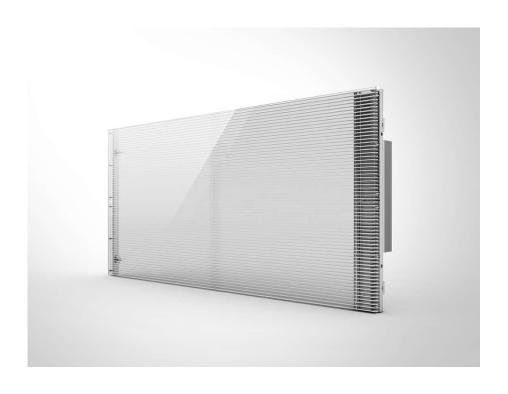

The cabinet and module adopt high permeability, light and thin design, up to 75%.






Energy saving, no need for air conditioning



Convenient installation & maintenance;



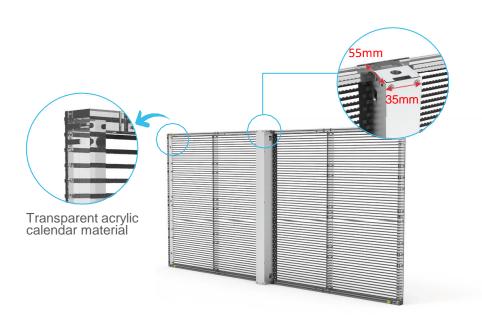



The module and box structure adopt a highly transparent and compact design. The width of the back power supply and the system box is only 35mm at the thickest part of 55mm.


The frame of the box is made of transparent plexiglass material, which makes the screen look more beautiful and simple;

The screen body will be hidden after installation, which makes the permeability higher.

Installation & Maintenance:

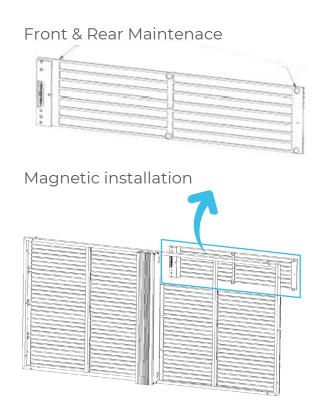













Lock the cabinets

Creative installation:




Curve shape optional

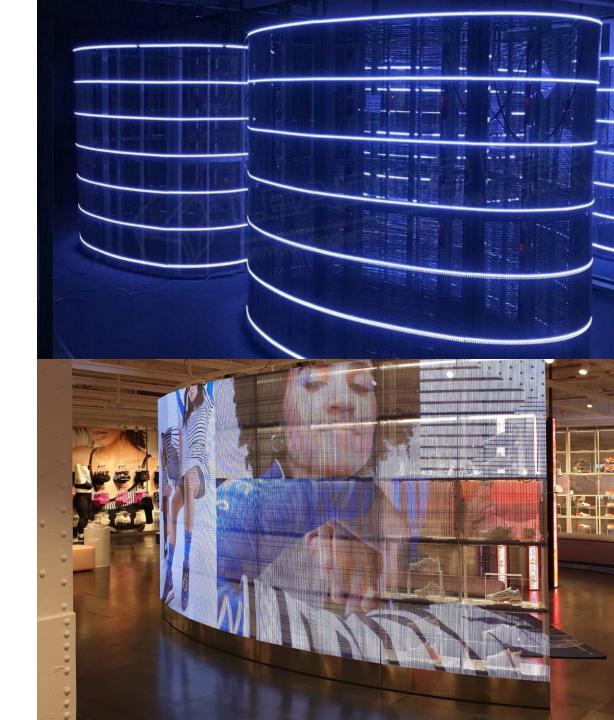



360 round shape transparent LED

Customized diameter

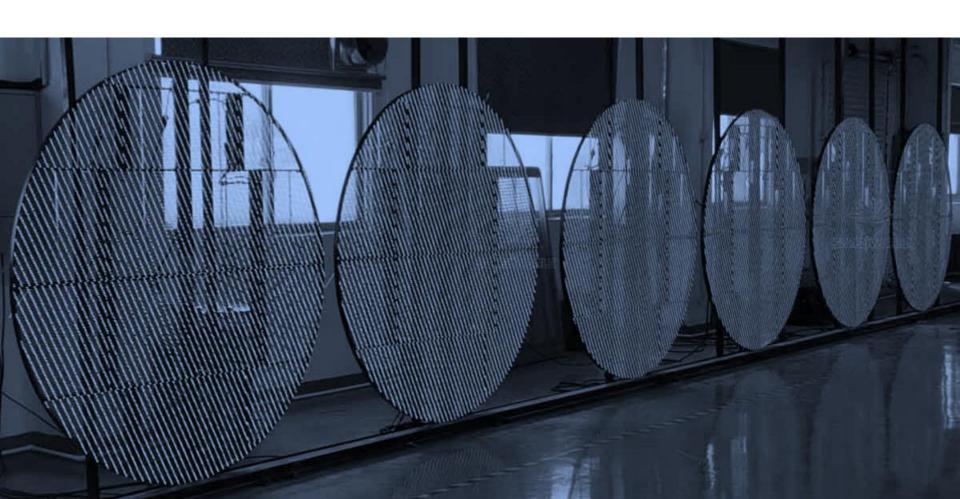

Indoor Specification

Pixel pitch(H x V)	2.6 x 5.2mm	3.9 x 7.8 mm	5.2 x 10.4mm	10.4x 10.4r	nm 15.6x15.6mm		
LED configuration	SMD1515	SMD1921	SMD1921	SMD2727	SMD2727		
Pixel Density	73728	32768	18432	9216	4096		
Brightness	3200 nits	2500 nits	2500 nits	1200 nits	1000nits		
Scan mode	1/12	1/8	1/4	1/2	Static		
Refresh rate	5120Hz	5120Hz	3840Hz	3840Hz	3840Hz		
Transparency	65%	78%	65%	65%	85%		
Cabinet size	1000mm x 500mm x 80mm (W X H X D) It can be rotated 90 degrees to install						
Cabinet Pixel	384 x 96	256 x 64	192 x 48	96 x 48	64 x 16		
Panel weight	2.5kg	4kg	4kg	4kg	4kg		
Input voltage	AC100~240V 50/60 HZ						
Power consumption (Avg) 260W/sqm							
Power consumption (Max) 800W/sqm							
Working temperature & Humidity -10°C~40°C, 10%-90% non-condensing							
IP rating	IP43						
Life span	100,000 hrs.						
Warranty	24 months						







Fully sealed, IP65 protection, waterproof, dustproof and anti-collision.



Up to 75% high transparency.




The weight per square meter is only 5.2KG. No need much space & change the building structure.



Energy saving, no need for air conditioning




Convenient installation & maintenance;

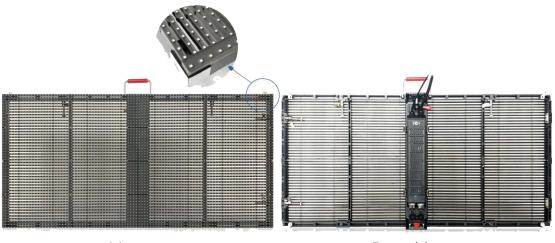

Front side Rear side



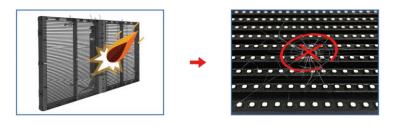

Full seal, high protection & waterproof

Evaporation on the surface, no damage

No worries about collision

No damage after collision






Upper & lower connecion



Connection
Piece with
screws



Upper & lower fixation

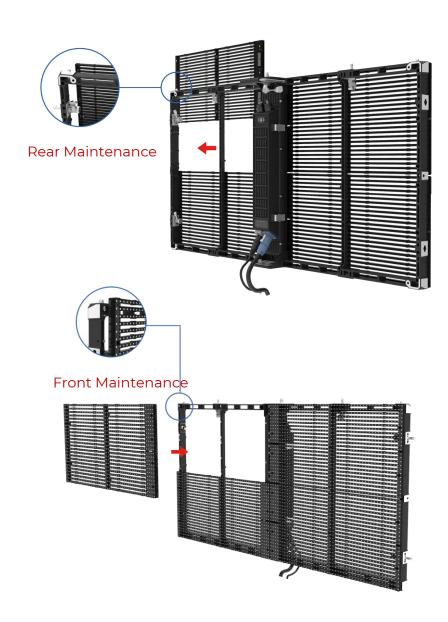

Outdoor Specification

Pixel pitch(H x V)	3.9 x 7.8 mm	5.2 x 10.4mm	10.4x 10.4mm	15.6 x 15.6mm				
LED configuration	SMD1921	SMD1921	SMD2727	SMD2727				
Pixel Density	32768	18432	9216	4096				
Brightness	4500 nits	4500 nits	5500 nits	5500nits				
Scan mode	1/8	1/4	1/2	Static				
Refresh rate	3840Hz	3840Hz	3840Hz	3840Hz				
Transparency	53%	58%	58%	71%				
Cabinet size	1000mm x 500mm x 80mm (W X H X D) It can be rotated 90 degrees to install							
Cabinet Pixel	256 x 64	192 x 48	96 x 48	64 x 16				
Panel weight	8kg	8kg	8kg	8kg				
Input voltage	AC100~240V 50/60 HZ							
Power consumption (Avg) 260W/sqm								
Power consumption (Max) 800W/sqm								
Working temperature & Humidity -10°C~40°C, 10%-90% non-condensing								
IP rating	IP65							
Life span	100,000 hrs.							
Warranty	24 months							

Services



Customized

Customize products for customers.



Online service

24-hour English online service



One-stop service

Complete system solution to improve operation efficiency.



Remote online service

Remote online debugging



Lifelong maintenance

Product lifetime maintenance




Efficient platform

Build a positive interaction platform




Outdoor Transparent LED Shopping mall



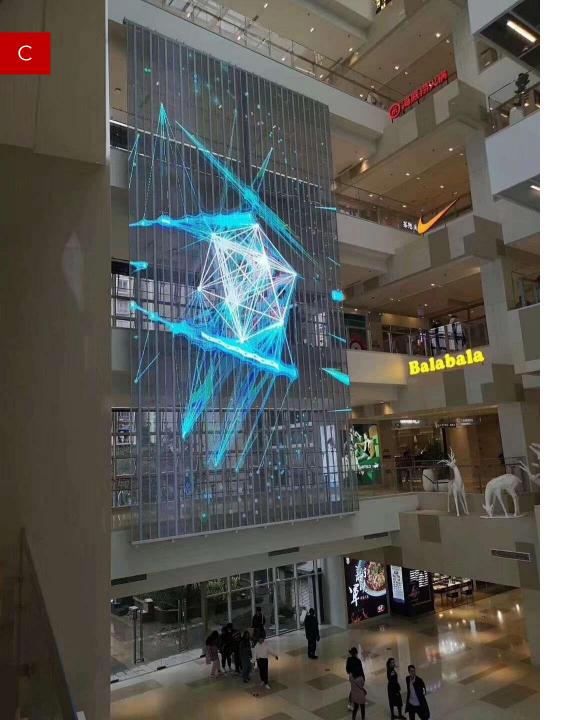

Indoor Transparent LED Shopping mall

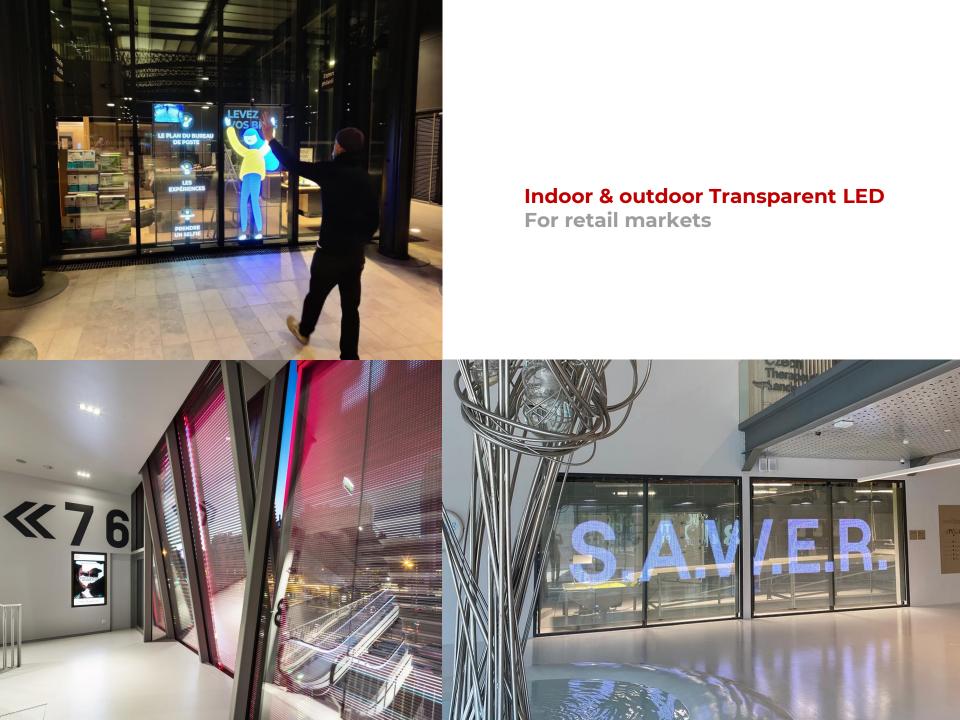

DOIT VISIONService

Customer' value is our top priority



Free inquiry with solutions

We will quote for any inquiry within 24 hours with quotations & specifications



Free drawing

Free drawing of structure, signal & power cable connection, customized solutions if needed



7/24 online technical support

Sales technical supports are ready anytime within warranty

Contacts



Address.

10 Aigeos Street, 1st Floor, Office Suite 1 Nicosia 1035, Cyprus



Tel.

Tel: +357 22 030 030 Fax: +357 22 030 031



Email.

E: info@intelligentsignage.cy